
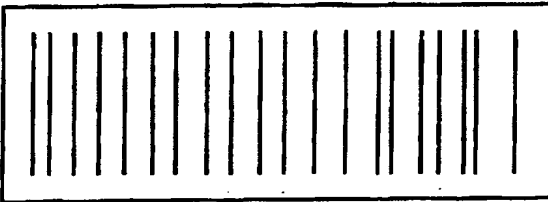


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

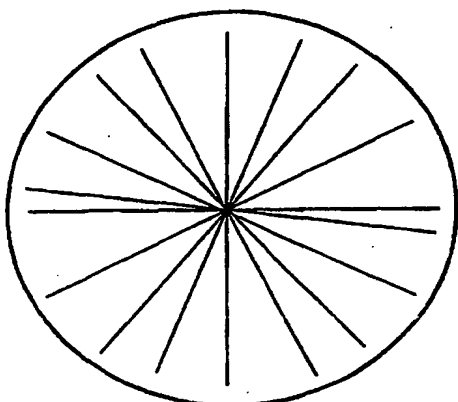

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01V 15/00		A1	(11) International Publication Number: WO 98/26312 (43) International Publication Date: 18 June 1998 (18.06.98)
(21) International Application Number: PCT/GB97/03389 (22) International Filing Date: 9 December 1997 (09.12.97) (30) Priority Data: 9625561.7 9 December 1996 (09.12.96) GB (71) Applicant (for all designated States except US): FLYING NULL LIMITED [GB/GB]; Harston Mill, Harston, Cambridgeshire CB2 5NH (GB). (72) Inventor; and (75) Inventor/Applicant (for US only): DAMES, Andrew, Nicholas [GB/GB]; 74 De Freville Avenue, Cambridge CB4 1HU (GB). (74) Agents: ABRAMS, Michael, John et al.; Haseltine Lake & Co., Imperial House, 15-19 Kingsway, London WC2B 6UD (GB).			(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.
(54) Title: MAGNETIC TAGS			
(57) Abstract <p>A magnetic tag is disclosed, the tag comprising a plurality of magnetically active elements supported on or by a substrate, the magnetically active elements displaying or being capable of displaying magnetic anisotropy. The tag is characterised in that the magnetically active elements are generally linear and have an axis of easy magnetisation along their length, and in that said elements are disposed so as to transect one another. In another embodiment, the tag is generally rectangular, having a major axis and a minor axis; a plurality of magnetically active elements are supported on or by a substrate, the magnetically active elements displaying or being capable of displaying magnetic anisotropy. The magnetically active elements are generally linear and have an axis of easy magnetisation along their length, and are disposed so as to transect the major axis of the tag.</p>			
 			

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

MAGNETIC TAGS

In previous patent applications, in particular PCT/GB96/00823 (WO96/31790) and PCT/GB96/00367 (WO97/04338), we have described and claimed novel techniques for spatial magnetic interrogation and novel magnetic tags. The technology described in WO96/31790 is based on exploiting the behaviour of magnetic materials as they pass through a region of space containing a magnetic null. In particular, these earlier applications describe, inter alia, how passive tags containing one or more magnetic elements can perform as remotely-readable data carriers, the number and spatial arrangement of the elements representing information.

In the above applications we described a number of possible system embodiments employing either permanent magnets or electromagnets to create the magnetic null. We also described several system implementations some of which are particularly appropriate for tags employing very low coercivity, high permeability magnetic elements. These implementations work by detecting harmonics of a superimposed low-amplitude alternating interrogation field.

In a later application, GB9612831.9 (and its counterpart PCT/GB97/01662), we described arrangements which work by detecting the baseband signals generated by the passage of the tag through the magnetic null, without the need for any superimposed alternating interrogation field. A specific design for a reader in the form of a narrow slot is also described.

The present application relates to certain types of magnetic tag which are expected to find use in

detection/interrogation systems of the type described in the earlier patent applications mentioned above, but also in other systems.

5 According to one aspect of the present invention, there is provided a generally rectangular magnetic tag having a major axis and a minor axis, which tag comprises a plurality of magnetically active elements supported on or by a substrate, the magnetically active elements
10 displaying or being capable of displaying magnetic anisotropy, characterised in that the magnetically active elements are generally linear and have an axis of easy magnetisation along their length, and in that said elements are disposed so as to transect the major
15 axis of the tag. Generally (but not necessarily) the magnetic elements will be disposed parallel to the minor axis of the tag.

A tag of this form can be read using a quadrupole
20 magnetic field. For example, satisfactory results have been obtained using an interrogation system of the sort described in PCT/GB96/00823 (published as WO 96/31790), with a 2D quadrupole field gradient of 2kA/m/m, an AC drive of 30 A/m rms at 6.25kHz, using second harmonic
25 detection at 12.5kHz; the tags included a plurality of magnetic elements formed from Vacuumschmelze's 6025 spin melt ribbon, each element having dimensions (in millimetres) of 32 x 0.8 x 0.025. The tag is moved through the interrogating field in the direction of its
30 major axis. For best operation, the plane of the tag should be located within 30° of the quadrupole axis.

An advantage of this type of tag construction is that greater density of data can be carried on a given tag
35 size.

According to another aspect of the present invention, there is provided a magnetic tag which comprises a plurality of magnetically active elements supported on or by a substrate, the magnetically active elements
5 displaying or being capable of displaying magnetic anisotropy, characterised in that the magnetically active elements are generally linear and have an axis of easy magnetisation along their length, and in that said elements are disposed so as to transect one
10 another.

In one embodiment, the tag is generally circular; in this case, the magnetic elements, or at least some of them, intersect one another at the centre of the
15 circle. In one particular embodiment, all of the magnetic elements are disposed as diameters of the circle. In another embodiment, the tag is in the form of a sphere or a spheroid and the magnetic elements are disposed as diameters of the sphere or spheroid.

20 Using the "circular" embodiment just described, the interrogation system uses a rotating scanned field of fixed magnitude 300 A/m, rotating at 16.66 Hz. The magnetic strips have dimensions (in millimetres) of 32
25 x 0.8 x 0.025 and are radially spaced by at least 6°. The interrogation system can be the same as that described above in relation to the first aspect of the invention.

30 Spherical arrays, where the magnetic elements are disposed as diameters of a sphere, are preferably such that the average strip spacing subtends an angle of about 9° at the notional centre of the sphere. Such a tag can have, for example, 252 magnetic strips.

35 Examples of tags of the invention are given in the

accompanying drawing, where Fig. 1 shows a tag of the first (rectangular) kind and Fig. 2 shows a tag of the second ("petal") kind.

- 5 The invention is not restricted to the embodiments described above, which are given as non-limiting examples.

CLAIMS:

1. A magnetic tag which comprises a plurality of magnetically active elements supported on or by a substrate, the magnetically active elements displaying or being capable of displaying magnetic anisotropy, characterised in that the magnetically active elements are generally linear and have an axis of easy magnetisation along their length, and in that said elements are disposed so as to transect one another.
2. A tag as claimed in claim 1, characterised in that said tag is generally circular in form.
3. A tag as claimed in claim 2, characterised in that said magnetically active elements or at least some of them intersect one another at the centre of the circle.
4. A tag as claimed in claim 1, characterised in that said tag is in the form of a sphere or a spheroid and the magnetic elements are disposed as diameters of the sphere or spheroid.
5. A generally rectangular magnetic tag having a major axis and a minor axis, which tag comprises a plurality of magnetically active elements supported on or by a substrate, the magnetically active elements displaying or being capable of displaying magnetic anisotropy, characterised in that the magnetically active elements are generally linear and have an axis of easy magnetisation along their length, and in that said elements are disposed so as to transect the major axis of the tag.
6. A tag as claimed in claim 1, characterised in

that said magnetically active elements are disposed parallel to the minor axis of the tag.

1/1

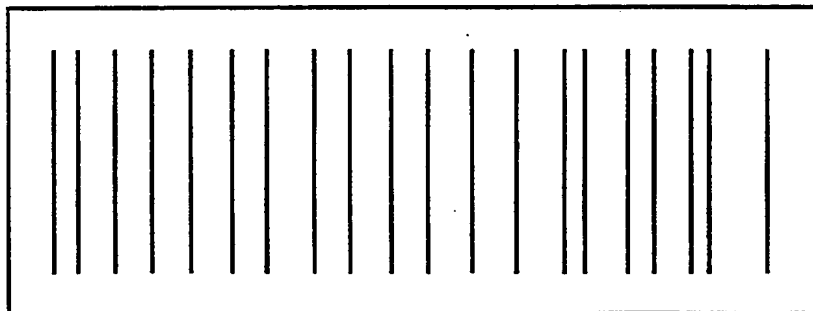


Fig. 1

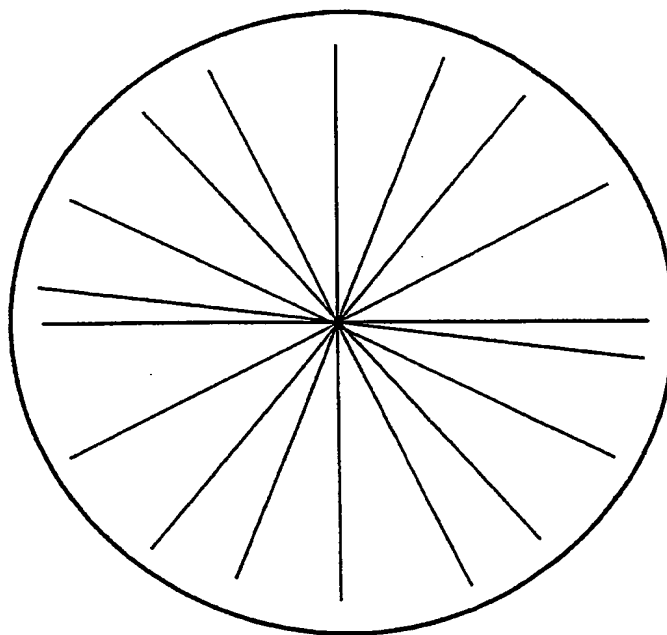


Fig. 2

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 97/03389

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G01V15/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G01V G08B E05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 017 907 A (CORDERY ROBERT A ET AL) 21 May 1991 see abstract see figures 4,5 see claims 1,2	5,6 1
A		
X,P	GB 2 312 595 A (FLYING NULL LTD) 29 October 1997 see abstract see figure 1 see page 6, line 10 - page 7, line 23 see claims 1,3,5,8,17	5,6
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

14 April 1998

Date of mailing of the international search report

21/04/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

de Heering, Ph.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 97/03389

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 295 085 A (SCIENT GENERICS LTD) 14 December 1988 see abstract see page 1, line 5 - page 1, column 20 see claims 1,7 see figures 3,4	5,6
A,P	EP 0 756 255 A (ESSELTE METO INT GMBH) 29 January 1997	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 97/03389

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5017907	A	21-05-1991	CA 2034045 A	17-07-1991
GB 2312595	A	29-10-1997	NONE	
EP 0295085	A	14-12-1988	AU 613045 B	25-07-1991
			AU 1746388 A	08-12-1988
			CA 1291244 A	22-10-1991
			DE 3855645 D	12-12-1996
			DE 3880202 A	19-05-1993
			DK 58089 A	08-02-1989
			DK 171570 B	13-01-1997
			EP 0295028 A	14-12-1988
			WO 8809979 A	15-12-1988
			JP 1064207 A	10-03-1989
			JP 2643312 B	20-08-1997
			JP 1503577 T	30-11-1989
			US 4960651 A	02-10-1990
			US 4940966 A	10-07-1990
EP 0756255	A	29-01-1997	DE 19617582 A	20-02-1997
			AU 6066596 A	30-01-1997
			CA 2181960 A	28-01-1997
			NO 962734 A	28-01-1997